



DH-HAC-HDW1100MP-S2

1Megapixel 720P Water-proof IR HDCVI Mini Dome Camera

DP €48

- >1/2.9" 1 Megapixel CMOS
- >25ps@720P
- >High speed, long distance real-time transmission
- >Day/Night(ICR), AWB, AGC, BLC, 2DNR
- >3.6mm fixed lens
- >Max. IR LEDs length 30m, Smart IR
- >IP67 Waterproof
- > DC12V
- > Metal



DH-HAC-HFW1000SP-0360B-S2

1Megapixel 720P Water-proof HDCVI IR-Bullet Camera

DP €48

- > 1 Megapixel CMOS
- >25ps@720P
- >High speed, long distance real-time transmission
- >Day/Night(ICR), AWB, AGC, BLC, 2DNR
- >3.6mm fixed lens
- >Max. IR LEDs length 30m, Smart IR
- > IP67 Waterproof
- > DC12V
- > Metal



HAC-HFW1200SP

2Megapixel 1080P Water-proof HDCVI IR-Bullet Camera

DP €59

- 1/2.7" 2 Megapixel CMOS
- >25ps@1080P
- >High speed, long distance real-time transmission
- >Day/Night(ICR), AWB, AGC, BLC, 2DNR
- >3.6mm fixed lens
- >Max. IR LEDs length 30m, Smart IR
- >IP67,
- > DC12V
- > Metal



DH-HAC-HFW2220SP-S2

2.4Megapixel 1080P Water-proof HDCVI IR-Bullet Camera

DP €84

- 1/2.8" 2.4 Megapixel CMOS
- >25/30fps@1080P,25/30/50/60fps@720P
- >High speed, long distance real-time transmission
- >HD and SD switchable
- >Day/Night(ICR), AWB, AGC, BLC, 2DNR
- >3.6mm fixed lens
- >Max. IR LEDs length 30m, Smart IR
- >IP67,
- > DC12V
- > Metal



DH-HAC-HDBW2120RP-Z-S2

1.3Megapixel 720P Vandal-proof IR HDCVI Dome VF Camera

DP €99

- >1/3" 1.3 Megapixel CMOS
- >25/30/50fps@720P
- >High speed, long distance real-time transmission
- >HD and SD switchable
- >DWDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- >2.7~12mm vari-focal motorized lens
- >Max. IR LEDs length 30m, Smart IR
- >IP67 Waterproof
- > IK10 Vandal Proof
- > DC12V
- > Metal



HAC-HDW1200R-VF

2Megapixel 1080P Water-proof IR HDCVI Dome VF Camera

DP €85

- 1/2.7" 2 Megapixel CMOS
- >25ps@1080P
- >High speed, long distance real-time transmission
- >Day/Night(ICR), AWB, AGC, BLC, 3DNR
- >2.7~12mm vari-focal lens
- >Max. IR LEDs length 30m, Smart IR
- >IP67 Waterproof
- > DC12V
- > Metal



DH-HAC-HFW2220RP-VF-IRE6-S2

2.4 Megapixel 1080P Water-proof IR HDCVI Bullet VF Camera

DP €119

- 1/2.8" 2.4 Megapixel CMOS
- >25/30fps@1080P, 25/30/50/60fps@720P
- >High speed, long distance real-time transmission
- >HD and SD switchable
- >DWDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- >2.7~12mm vari-focal lens
- >Max. IR LEDs length 60m, Smart IR
- >IP67,
- > DC12V
- > Metal



Fixed Lens


Vari-Focal Lens

Model		HCVR4104HS-S2	DHI-HCVR4116HS-S2
		€82	€195
Main Processor		Embedded processor	
Operating System		Embedded LINUX	
Video			
Input		4 channel, BNC	16 channel, BNC
Standard	Analog	NTSC/PAL	
	HDCVI	720P HDCVI Camera	
	IP	Support 2ch 1080P/720P IP Camera	
Audio			
Input		1 channel, RCA	
Output		1 channel, RCA	
Two-way Talk		Reuse audio input/output channel 1	
Display			
Interface		1 HDMI, 1 VGA	
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768	
Display Split		1/4	1/4/8/9/16
Privacy Masking		4 rectangular zones (each camera)	
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording			
Video/Audio Compression		H.264/G.711	
Record Rate	Main Stream:	720P/960H/D1/(1~25/30fps)	1*720P(1~25/30fps)+15*(1~15fps)/960H/D1 (1~25/30fps)
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop	
Record Interval		1~60 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
Video Detection			
Trigger Events		Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Playback & Backup			
Sync Playback		1/4	1/4/9/16
Search Mode		Time/Date, MD & Exact search (accurate to second)	
Network			
Ethernet		RJ-45 port (10/100M)	
Network Functions		HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access		128 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
Storage			
Internal HDD		1 SATA port, up to 4TB	
Auxiliary Interface			
USB Interface		2 ports(1 Rear), USB2.0	
RS485		1 port, For PTZ Control	
General			
Power Supply		DC12V/1.5A	DC12V/2A

HCVR4104HS-S2

07 07 2016

HCVR4116HS-S2

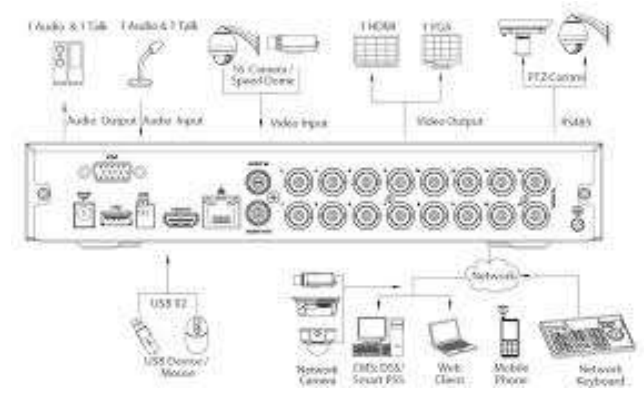

Model		DHI-HCVR5108HS-S3	HCVR5208A-S2
		€171	€260
Main Processor		Embedded processor	
Operating System		Embedded LINUX	
Video		All channel 1080N/720P realtime or 1080P non-realtime recording	
Input		8 channel, BNC	8 channel, BNC
Standard	Analog	NTSC/PAL	
	HDCVI	1080P/720P HDCVI Cameras	
	IP	8+4 up to 5Mp	Support 2ch 1080P/720P
Audio			
Input		1 channel, RCA	4 channel, RCA
Output		1 channel, RCA	
Two-way Talk		Reuse audio input/output channel 1	
Display			
Interface		1 HDMI, 1 VGA	
Resolution		1920×1080, 1280×1024, 1280×720, 1024×768 QCIF(176×144/176×120)	
Privacy Masking		4 rectangular zones (each camera)	
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Recording			
Video/Audio Compression		H.264/G.711	
Record Rate Main		1080P(1~15fps)/1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)	
Main Stream:			
Record Mode		Manual, Schedule(Regular(Continuous), MD), Stop	
Record Resolution		1080P(1920×1080)/1080N(960×1080)/720P(1280×720)/960H(960×576/960×480)/D1(704×576/704×480)/HD1(352×576/352×480)/BCIF(704×288/704×240)/CIF(352×288/352×240) / QCIF(176×144/176×120)	
Video Detection			
Trigger Events		Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tip	
Video Detection		Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input		N/A	8 channel
Relay Output		N/A	3 channel
Network			
Ethernet		RJ-45 port (10/100M)	RJ-45 port (10/100)
Network Functions		HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPOE, DDNS, FTP, IP Filter, SNMP, P2P	
Max. User Access		128 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
Storage			
Internal HDD		1 SATA port, up to 6TB	2 SATA ports, up to 8TB
Auxiliary Interface			
USB Interface		2 ports x USB2.0	2 ports x USB2.0
RS485		1 port, For PTZ Control	
General			
Power Supply		DC12V/2A	DC12V/4A

HCVR5208A-S2




DHI-HCVR5108HS-S3



Model	PFM801		
DAHUA PASSIVE HDCVI BALUN WITH POWER TO RJ45			
€19			
Properties			
Transmission Signal	1 channel HDCVI		
Transmission Distance	HDCVI: 720P, 400M(max); 1080P, 200M(max)		
Power Supply	Input Voltage	Distance	Output Power
	DC24	0-100M	DC12V 8W
		100-200M	DC12V 6W
		200-300M	DC12V 3W
DC36	0-300M	DC12V 8W	
Category Type	UTP CAT5E/6		
Video Transmission Properties			
Coaxial Video Connector	BNC-M		
Connection Way	RJ45		
Compatible Format	HDCVI/TVI/AHD		
Resolution	720P/1080P		
Anti-interference	>60db		
Protection			
ESD	1a contact discharge electricity level 3		
	1b air discharge electricity level 3		
	Per: IEC61000-4-2		
Coaxial Cable Connector	2KV(common-code) Per: IEC61000-4-5		
UTP Cable Connector	2KV(different-code), 4KV(common-code) Per: IEC61000-4-5		
Impedance			
BNC Male	75 ohms		
UTP Cable	100 ohms		
Physical Properties			
Dimension(L*W*H)	72.6mm*42.5mm*24.5mm		
Shell	ABS		
Color	Black		
N.W.	66.4g/57.4g		
Stability			
MTBF	>10000H		



Model	PFM800
DAHUA PASSIVE HDCVI BALUN WITHOUT POWER	
€9,99	
Transmission Signal	1 channel
Transmission Distance	720P: 400M (max) 1080P: 250M (max)
Category Type	UTP CAT 5E/6 (R < 10Ω/100M)
Video Transmission Properties And Port	
Coaxial Video Connector	BNC-M
Twisted-pair Video Connector	Push-terminal
Compatible Format	HDCVI
Resolution	720P/1080P
Anti-interference	> 60db
Protection	
ESD	1a contact discharge electricity level 3
	1b air discharge electricity level 3
	Per:IEC61000-4-2
Coaxial Cable Connector	2KV(common-code) Per:IEC61000-4-5
UTP Cable Connector	2KV(different-code),4KV(common-code),Per:IEC61000-4-5
Impedance	
BNC Male	75 ohms
UTP Cable	100 ohms
Physical Properties	
Dimension(L*W*H)	53mm*20mm*17mm
Shell	ABS
Color	Black
N.W.	25G
Stability	
MTBF	> 10000H

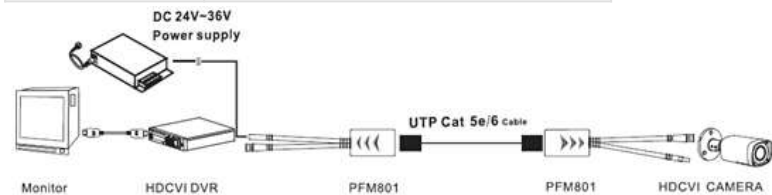

Model	PFM321
SINGLE POWER SUPPLY DC12V UK PLUG	
€12	
General	
Input	AC100~240V,50/60Hz, 0.5A
Output	DC12V (+ 7%,-3%) --1A (±2%)
Working temperature	-30~70°C
Working humidity	<90%
Weight	150g
Dimension	84mm×41mm×26mm
Installation mode	Plane installation
Color	Black
Outgoing line length	AC wire: 50cm, DC wire: 80cm
Certification	CE, FCC, CEC

Model	PFM322
FOUR IN ONE CENTRALIZE POWER SUPPLY DC12V UK PLUG	
€19	
General	
Input	AC100~240V,50/60Hz, 0.6A Max
Output	DC12V(+ 7%,-3%)_0.7A(±3%)(each group)
Working temperature	-30~70°C
Working humidity	<90%
Weight	210g
Dimension	148mm×70mm×31mm
Installation mode	Plane installation
Color	Black
Outgoing line length	AC wire: 50cm, DC wire: 80cm
Certification	UL, CE, FCC, CEC

Model	AC24V,1.5A
SINGLE POWER SUPPLY AC24V/1.5A	
€16	
General	
PRI	230V,50Hz
sec	24V/1500mA 36VA
Color	Black



- Easy installation
- With indicator light working
- Accurate overcurrent, overvoltage protection
- UK Plug



- Easy installation
- Four independent power supply ports output 0.7A
- Accurate overcurrent, overvoltage protection
- UK Plug